

Nali Top/Spout and Top Mix Ramming mass

Technical Specifications of Rishi Minerals Quartz and Raw Material:

Silica	SiO ₂	97% min
Alumina	Al ₂ O ₃	0.4% max
Iron Oxide	Fe ₂ O ₃	0.015%

Technical Specifications of Rishi Minerals Spout and Top Mix Silica Ramming Mass:

Product Name	Grain Size	Yield or Bulk Density	Chemical Binder
Spout/Top Mix Silica Ramming Mass	0 to 5mm	2.18 g/cm ³	None. (boron is nil.)

Installation method:


Mix with Sodium Silicate slurry and perform manual ramming on Top Sides and Channel above the induction coils.
(Orange and yellow in picture)

Standard Packing:

50Kg ± 2Kg in New PP bags
(Labelled with Product Name).

Shelf life:

6 months (store in cool and dry condition)

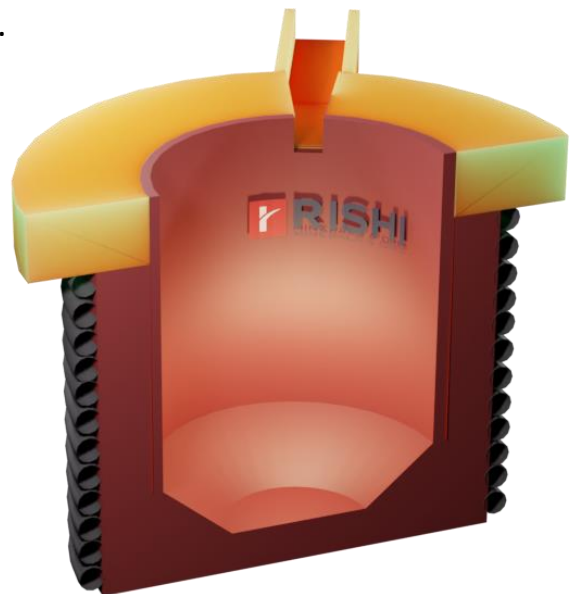

Signed by Management,
Rishi Minerals and Ores India Pvt Ltd



Works:
 Plot No 25,
 Gollapuram Industrial
 Park, Hindupur Mandal,
 Hindupur – 515211,
 Anantpur District (AP)

Contact:
 +91 9900598866
 +91 9620060550
info@rishiminerals.in
www.rishiminerals.in

Office:
 # 14/3, Byrasandra Main Road,
 Near Madhavan Park, 1st Block
 Jayanagar Bangalore - 560011
 CIN : U24119KAPTC050609